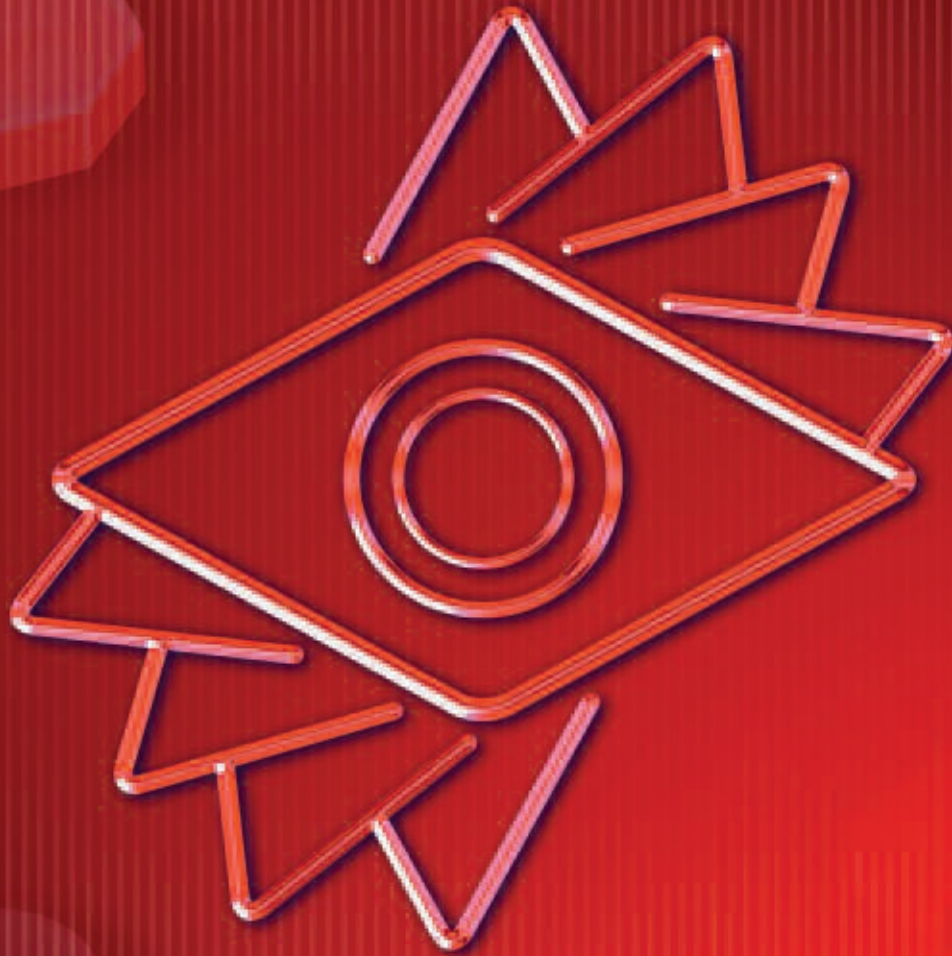
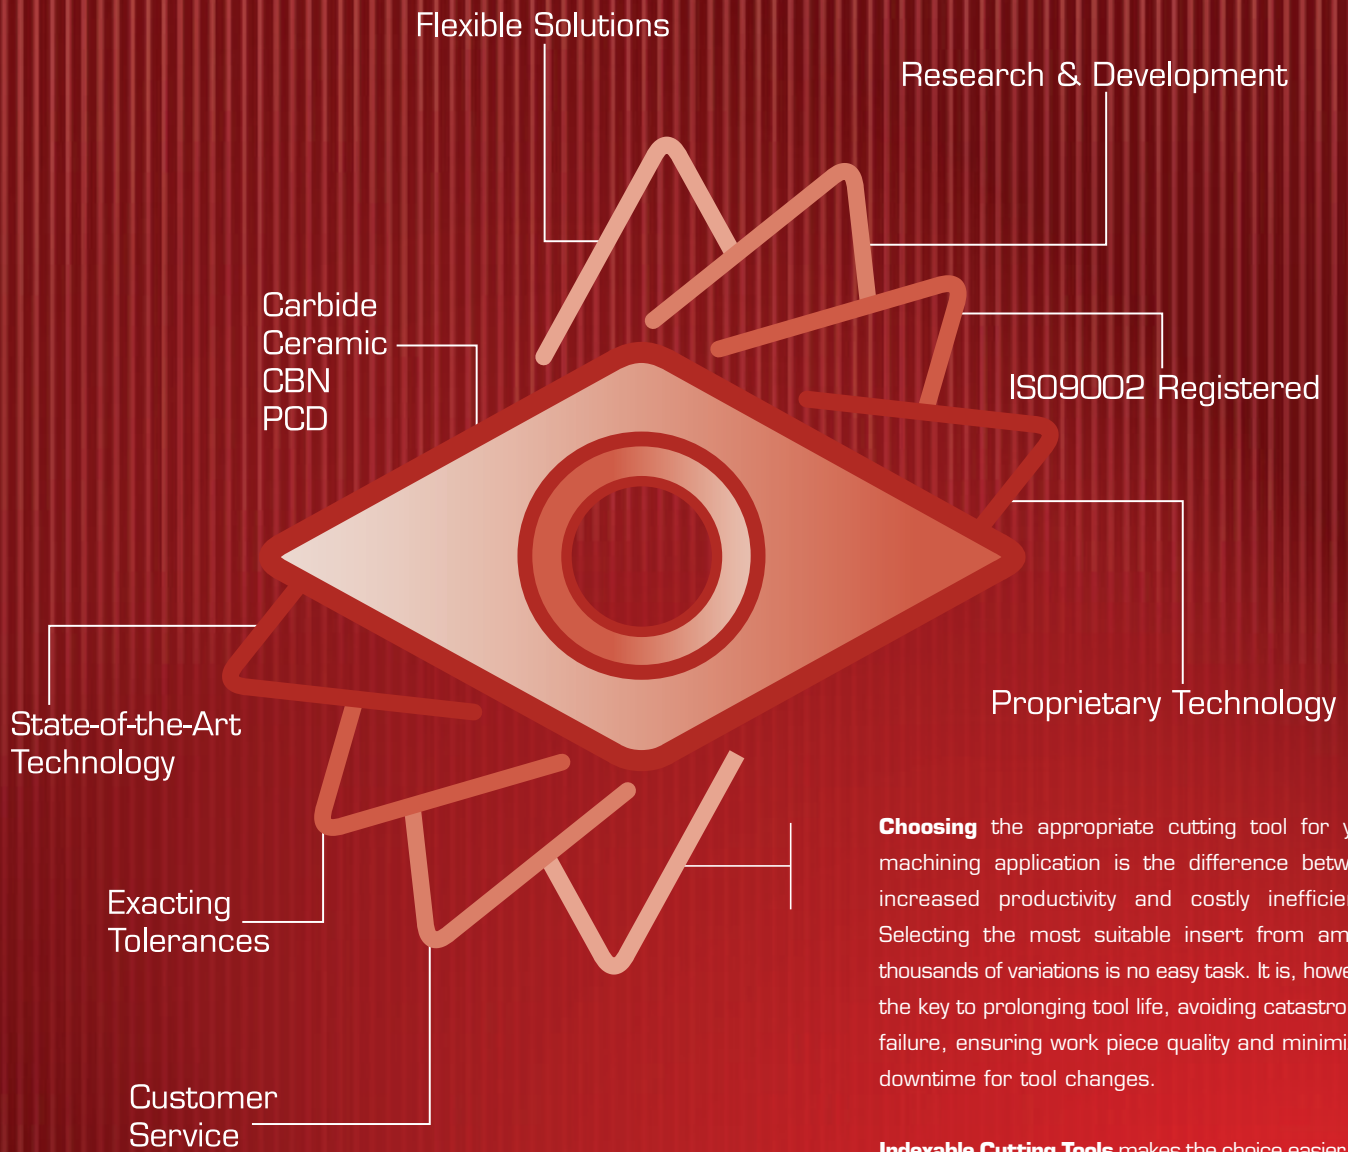


PCD/PCBN Inserts



Indexable
CUTTING TOOLS

Our edge is
excellence



Choosing the appropriate cutting tool for your machining application is the difference between increased productivity and costly inefficiency. Selecting the most suitable insert from among thousands of variations is no easy task. It is, however, the key to prolonging tool life, avoiding catastrophic failure, ensuring work piece quality and minimizing downtime for tool changes.

Indexable Cutting Tools makes the choice easier. For 40 years, Indexable has been dedicated to meeting the cutting tool needs of customers in industries as diverse as automotive, aerospace, electronic and heavy equipment manufacturing. Through our broad range of products, technical expertise, R & D capabilities and commitment to customer service. **Indexable** provides cost-effective, flexible solutions to any cutting challenge.

By utilizing advanced, proprietary technology, we manufacture precision ground inserts that provide consistent, increased productivity. An **ISO9002** registered company, **Indexable** is driven by an emphasis on quality in everything we do.

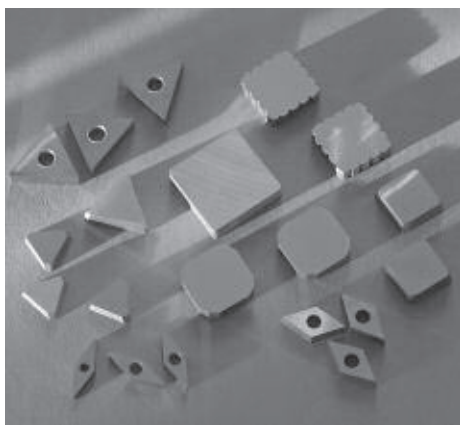
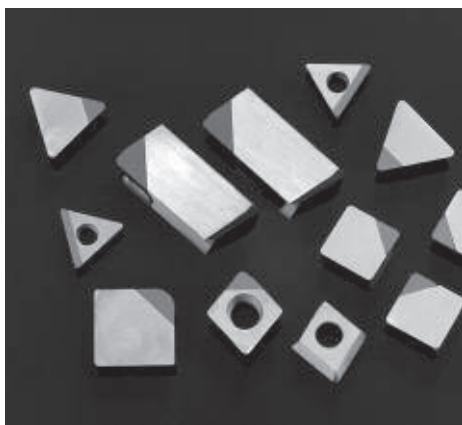
In a world where continual improvement is paramount to your business' competitive edge, look to **Indexable**. After all, our edge is excellence.



Indexable offers a broad range of cutting tool materials to meet your machining needs. Whether your production systems involve hard turning or milling, require heavy roughing or high speed finishing, machine high silica aluminum or tough superalloys, we have the product.

Our carbide inserts offer a cost-effective solution for general purpose machining as well as a number of special applications. With a wide variety of grades, chipbreakers and coatings, you'll find the tool best suited to your application.

The Indexable line of **CBN** tooling (cubic boron nitride) offers great hardness and abrasion resistance, coupled with extreme chemical stability when in contact with ferrous alloys at high temperatures. It has the ability to machine both steels and cast irons at high speeds for long operating cycles.



Indexable's family of five **PCD** (polycrystalline diamond) grades can satisfy all of your nonferrous and non-metallic machining needs, from the roughest and most conditions and materials to the tightest tolerance and smoothest surface finish requirements. Our PCD inserts deliver maximum productivity.

Made from the finest powders in the world, using proprietary technology, **Indexable** manufactures one of the strongest, wear resistant **ceramics**. A patented microwave sintering process produces a very fine-grained micro-structure with enhanced hardness, toughness and high temperature strength. Called **MicroWear**, this family of ceramics can machine a broad range of materials from the hardest cast irons to the toughest high-temperature alloys.

Engineered and manufactured using state-of-the-art technology, all of our inserts are of exceptional detail and exacting precision. So when you're looking for quality and increased productivity, look no further than **Indexable Cutting Tools**.



TABLE OF CONTENTS

PLEASE NOTE:

Indexable catalogs **DO NOT SHOW** the complete line of any given product. At least **50%** of Indexable sales are for inserts not represented in our catalogs. For a more detailed understanding of INDEXABLE's manufacturing capabilities, visit our website at ***WWW.INDEXABLE.COM***

If you fail to find an item you are looking for please do not hesitate to contact our knowledgeable staff at ***INFO@INDEXABLE.COM***. Indexable has the manufacturing capability of producing a wide array of inserts.

RECONDITIONING OF INSERTS AND CARTRIDGES	PAGE 1
PCD/PCBN INFORMATION	PAGES 2-7
NOMENCLATURE	PAGES 8-9
SINGLE TIPPED INSERTS	PAGES 10-12
FULL TOP INSERTS	PAGES 13-14
SOLID INSERTS	PAGES 15-16
CARTRIDGE INSERTS	PAGES 17-18
DOUBLE TIPPED INSERTS	PAGE 18
SPECIALS	PAGE 19

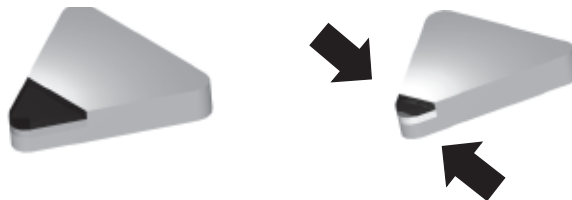
PCD/PCBN

RELAP/RESIZE/RETIPPING OF PCD/PCBN INSERTS AND CARTRIDGES

When considering any insert from this catalog, remember that a majority of these can be reconditioned. **INDEXABLE** offers 3 different ways to recondition your insert or cartridge to optimize the cost effectiveness of this tooling.

RELAPPING

This is accomplished by using CNC grinding technology to obtain the correct cutting edge quality desired. Insert or cartridge is reduced in size, and, if more than .015"(.381MM) needs to be ground, the tool will be rejected. It may be reconditioned using another of Indexable's PCD/PCBN reconditioning processes if applicable. This is by far the most economical process available.



RESIZING

Resizing the insert or cartridge is accomplished by removing the segment, preparing the pocket, and inserting a shim between the body and segment. This allows the tool to be returned to its original size, through CNC grinding technology. If more than .020"(.508MM) has to be removed, the tip is not acceptable, and must be retipped. If resizing is a viable option, it allows for an economical way to return the tooling to like-new standards.



RETIPPING

Once the tool can't be relapped or resized, retipping the tool becomes an option. Retipping allows the body of the insert to be retained, and a new PCD/PCBN tip is applied, CNC ground and returned to new tool quality and standards. Retipping is also an option when the segment has suffered severe fracture, but the tool body is not damaged.



If you require relapping, resizing or retipping, call the knowledgeable staff of **INDEXABLE** at (001)(905)735-8665, or email at **INFO@INDEXABLE.COM**

PCD/PCBN

**POLYCRYSTALLINE
DIAMOND
(PCD)**

**POLYCRYSTALLINE
CUBIC BORON NITRIDE
(PCBN)**



**NON-FERROUS
APPLICATIONS**

**FERROUS
APPLICATIONS**

ALUMINUM ALLOYS
PISTONS
WHEELS
GEARBOXES
BRAKE CYLINDERS

HARD CAST IRON
PUMPS
IMPELLER
SHAFTS

COPPER ALLOYS
COPPER
ENGINE BEARINGS
BUSHINGS
PUMP SEATS

SOFT CAST IRON
ENGINE BLOCKS
BRAKE ROTORS
BRAKE DRUMS
CLUTCH PLATES

HIGHLY ABRASIVE MATERIALS
INDUSTRIAL CERAMICS
SINTERED CERAMICS
ALUMINUM OXIDE
SPARK PLUG INSULATORS

SINTERED IRON
VALVE SEATS
CAM SHAFTS
GEARS

FIBRE PRODUCTS
CARBON FIBRE
FIBREGLASS
REENFORCED GRAPHITE
ACRYLIC PLASTICS
PHENOLIC PLASTICS

HARDENED STEELS
PINION GEARS
SIDE GEARS
TRANSMISSION
SHAFTS
BEARINGS

WOOD AND STONE
FIBREBOARD
PLYWOOD
MELANIMIC PANELS
GRANITE
SANDSTONE

SUPERALLOYS
TURBINE DISK
TURBINE BLADE
TURBINE
SHROUDS
ENGINE SHAFTS
TURBINE VANES

FOR APPLICATION OF PCD/PCBN GRADES SEE PAGES 5-6, FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.

PCD/PCBN

PCD CUTTING RECOMMENDATIONS

MATERIAL	SPEED (SF/M)	DOC	FEED
ALUMINUM <12%	1000-6000	.002-.125	.004-.015
ALUMINUM <18%	500-2500	.002-.125	.002-.010
COPPER	1200-3500	.005-.100	.005-.020
BRASS	1200-3500	.005-.125	.005-.020
SINTERED CARBIDE	40-90	.005-.125	.004-.020
UNSINTERED CARBIDE	400-1200	.005-.100	.004-.025
PRESSED CERAMICS	200-800	.001-.005	.001-.005
FIBREGLASS	300-9000	.005-.020	.001-.010
NYLONS AND ACRYLICS	550-10000	.002-.100	.005-.020
HARD RUBBER	550-2500	.005-.125	.004-.020

PCBN CUTTING RECOMMENDATIONS

CARBON STEEL	200-500	.008	.020
BEARING MATERIAL	200-500	.008	.020
ALLOY STEELS	200-500	.008	.020
TOOL/DIE STEEL	160-350	.008	.020
HIGH TENSILE CAST IRONS	200-500	.060	.020
CHILLED CAST IRON	130-260	.032	.020
GREY CAST IRON	2000-4000	.020	.020
POWERED METAL	500-650	.016	.020
INCONEL	500-650	.006	.020
RENE42	500-650	.006	.020
RENE 77	450-550	.006	.020
INCOLOY	750-900	.006	.020
MONEL	550-650	.006	.020

FOR APPLICATION OF PCD/PCBN GRADES SEE PAGES 5-6, FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.

EDGE PREPARATION

Compressive stress: T-Land or Honing

-It is important to maintain the cutting edge of PCBN tools under a compressive stress. In order to achieve this, most applications for PCBN require a t-land or honed edge.

-Honing and t-lands are cutting edge shapes that maintain cutting edge strength.

EDGE GEOMETRY IS LARGELY DEPENDANT ON DOC, CUTTING MODE (CONTINUOUS OR INTERRUPTED), SURFACE CONDITION AND WORK PIECE, ETC.

Effect of t-land or honing

- Enlarging the t-land or hone increases cutting edge strength and reduces fracturing.
- Enlarging t-land or hone size increases flank wear occurrence and shortens tool life.
- Enlarging the t-land or hone size increases cutting resistance and chattering.

WHEN TO DECREASE T-LAND SIZE

- In finishing with a small depth of cut and small feed.
- When work material is malleable.
- When workpiece and/or the machine have poor rigidity

WHEN TO INCREASE T-LAND SIZE

- When workpiece material is hard
- When cutting edge strength is required, such as in an uncut surface or interrupted cutting.
- When the machine has high rigidity.

MATERIAL	HIGH % PCBN		LOW % PCBN	
	ROUGH	FINISH	ROUGH	FINISH
HARDENED STEEL	20°X.008-.010 (0.2-0.25MM)			25°X.004 (0.1MM)
HARD FACED ALLOYS	20°X.008 (0.2MM)	20°X.008 (0.2MM)		25°X.004 (0.1MM)
SOFT GRAY CAST IRON	20°X.008 (0.2MM)	20°X.008 (0.2MM) /0.010(.25MM) HONE		
SUPERALLOY	20°X.008 (0.2MM)	20°X.008 (0.2MM) /0.010(.25MM) HONE		

ACCORDING TO DEPTH OF CUT

MATERIAL	ROUGHING >0.020" DOC(0.5MM DOC)	FINISH < 0.020" DOC(0.5MM DOC)
HARDENED STEEL	20°X.008-.010(0.2-0.25MM)	25°X.004(0.1MM)
POWER METAL	20°X.008(0.2MM)	20°X.008(0.2MM)
SOFT GRAY CAST IRON	20°X.008(0.2MM)	20°X.008-.010(0.2-0.25MM)
SUPERALLOY	20°X.008-.010(0.2-0.25MM)	20°X.008(0.2MM)

FOR APPLICATION OF PCD/PCBN GRADES SEE PAGES 5-6, FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.

PCBN

GRADE INFORMATION AND APPLICATIONS

Grade	TYPE	CBN (VOL.%)	GRAIN SIZE	MAJOR BINDER	APPLICATION
CBN 45	CARBIDE BACKED	45	<1	TITANIUM NITRIDE	-Low thermal conductivity -Strong edge due to low edge compressiveness
CBN 50	CARBIDE BACKED	50	2	TITANIUM CARBIDE	-Good thermal stability and crater resistance -High-speed continuous machining of hardened steel
CBN 60	CARBIDE BACKED	60	2	TITANIUM NITRIDE	-Combination of wear resistance and impact strength -General usage in continuous and interrupted cutting of hardened steel
CBN 70	CARBIDE BACKED	70	2	TITANIUM CARBONITRIDE	-High degree of toughness due to fine microstructure of CBN and ceramic binder -Rough and interrupted machining of hardened steel
CBN 80	CARBIDE BACKED	80	3	TITANIUM NITRIDE	-Combination of wear resistance and thermal properties -Superior to other grades in machining superalloy
CBN 90	CARBIDE BACKED	90	3	TITANIUM NITRIDE	-Higher toughness and heat resistance as an alternative to CBN 95 -Machining non-homogenous cast iron and power metal alloys
CBN 95	CARBIDE BACKED	95	3	TITANIUM ALLOY	-Extreme wear resistance due to high content CBN and metal binder -Excellent at machining various cast irons
CBN 100	SOLID FORM	93	10	ALUMINUM NITRIDE	-Extreme wear resistance due to coarser CBN and high content -Rough machining of cast iron and power metal alloys

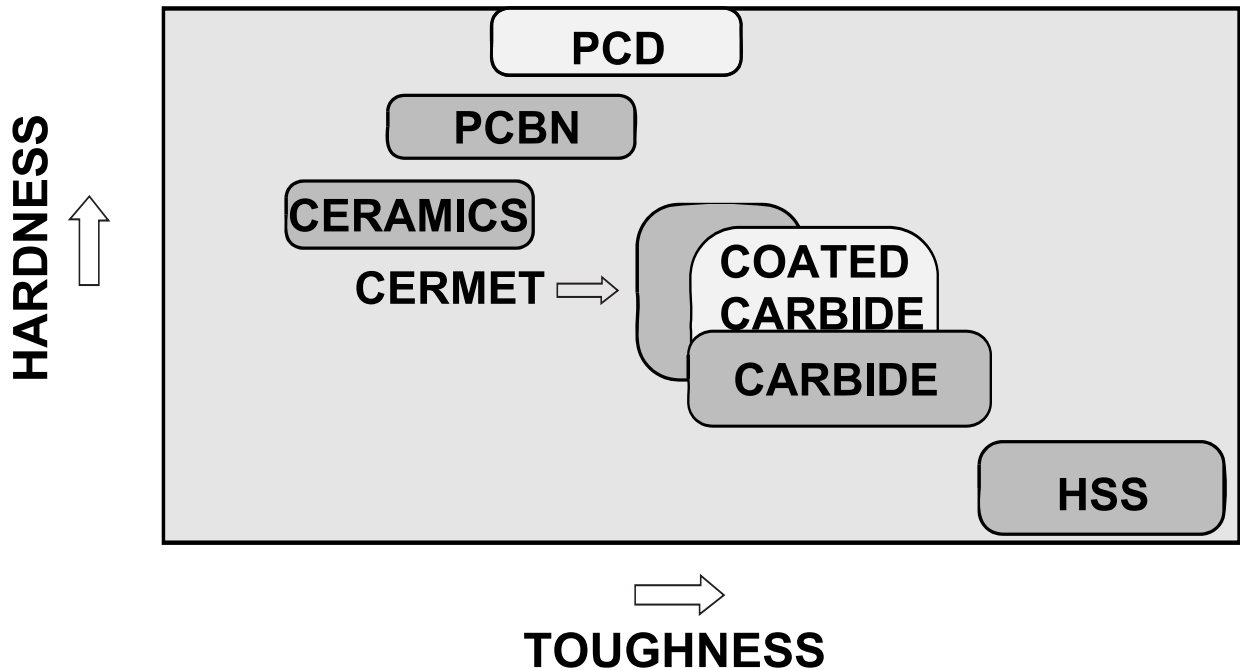
FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.

PCD

GRADE INFORMATION AND APPLICATIONS

Grade	TYPE	PCD (VOL.%)	GRAIN SIZE	MAJOR BINDER	APPLICATION
PCD	CARBIDE BACKED	92	10	CO	-GENERAL PURPOSE GRADE -GOOD SURFACE FINISH -GOOD WEAR RESISTANCE
PCD3	CARBIDE BACKED	94	30	CO	-SUPERIOR WEAR RESISTANCE -STRONG DIAMOND BOND
PCD-F	CARBIDE BACKED	90	4	CO	-GOOD SURFACE FINISHING
PCD-UF	CARBIDE BACKED	90	2	CO	-EXCELLENT SURFACE FINISH
PCD-XUF	CARBIDE BACKED	90	0.5	CO	-EXCELLENT SURFACE FINISH -GOOD WEAR RESISTANCE -SUITED FOR WOODWORKING APPLICATIONS

CUTTING TOOL MATERIALS



FOR COMPARISON TO OTHER MANUFACTURERS GRADES, SEE PAGE 7.

PCD-GRADE COMPARISON CHART






















GRAIN SIZE	PARTICLE	INDEXABLE	GE	E6	SUMITOMO	TOMEI	MEGADIAMOND
COARSE	50				DA90		
	30	PCD 3		CTM302		TDC-E	C30X
	25		COMPAX1800	CTH025			
			COMPAX1500	CTB025			
MEDIUM	12					TDC-H	
	10	PCD		CTB010			M10
	8						
	7					TDC-S	
	5		COMPAX1300		DA150		F05/HM20
FINE	4	PCD-F	COMPAX 1600				
	3					TDC-G	
	2	PCD-UF		CTB002			
				CTC002			
	1					TDC-F	
	0.5	PCD-XUF			DA200	98FIIM	
				DA2200			

PCBN-GRADE COMPARISON CHART

	TOOL MAKER										MATERIAL MAKER		
	INDEXABLE	SUMITOMO	MEGA	MITSUBISHI	TOSHIBA	SECO	DIJET	KYOCERA	KENNA-METAL	SPK	DI	E6	SHOWA DENKO
CAST IRON/NI-HARD/ SUPERALLOY													
SOLID TYPE	CBN100	BNS800	N100	MB940		CBN300	JBN10	KBN900		WBN100	BZN7000S	AMB90	
GENERAL MACHINING	CBN95	BN600	N90	MB710	BX950	CBN300 CBN20	JBN500	KBN60G	KD120	WBN100	BZN6000	DBA80	KT10
↓	CBN80 CBN80D	BN600 BN100	N90	MB710 MB730	BX950 BX850	CBN300 CBN20	JBN500	KBN60G	KD200	WBN750	BZN6000	DBA80	KT10 KT10C
HARD MACHINING	CBN95 CBN90	BN500	N90	MB730	BX950 BX930 BX450	CBN300	JBN500	KBN60G	KD200	WBN700	BZN6000	DBA80	KT20C
HARDENED STEEL													
INTERRUPTED CUTTING	CBN45	BN300		MB835	BX380	CBN150			KD200	WBN500			
↓	CBN60 CBN70	BN250 BNX25	N50	MB835 MB825	BX380 BX360	CBN150	JBN300	KBN25B	KD200	WBN550	BZN8100 BZN8200	DBN45	KT30X KT25
↓	CBN60 CBN70	BN250 BNX20	N50	MB825 MB820 MB8025	BX360 BX330	CBN10 CBN100	JBN300 JBN330	KBN25B KBN10B	KD05	WBN600	BZN8100 BZN8200	DBN45	KT30N KT30
CONTINUOUS CUTTING	CBN50	BNX10 BNC80	NT50	MB810 MB8025	BX310	CBN10 CBN100	JBN330	KBN10B	KD05	WBN650	HTC2000	DBC50	

For application of INDEXABLE grades, see pages 5-6

NOMENCLATURE

SHAPE	TOLERANCE																				
	ANSI		ISO																		
A - Parallelogram 85° B - Parallelogram 82° C - Diamond 80° H - Hexagon L - Rectangle M - Diamond 86° N - Diamond 87° O - Octagon P - Pentagon R - Round S - Square T - Triangle	Cutting point	Thickness								Triangular insert with secondary cutting edge 											
	A	±.0002	±.001	SYM. m d s A ±.005 ±.025 ±.025 F ±.005 ±.013 ±.025 C ±.013 ±.025 ±.025 H ±.013 ±.013 ±.025 E ±.025 ±.025 ±.025 G ±.025 ±.025 ±.13 J ±.005 ±.05~±.13 ±.025 K* ±.013 ±.05~±.13 ±.025 L* ±.025 ±.05~±.13 ±.025 M* ±.08~±.18 ±.05~±.13 ±.13 N* ±.08~±.18 ±.05~±.13 ±.025 U* ±.13~±.38 ±.08~±.25 ±.13	I.C.     	6.35 ±.08 - - - - 9.525 ±.08 ±.08 ±.08 ±.11 ±.13 12.70 ±.13 ±.13 ±.13 ±.15 - 15.875 ±.15 ±.15 ±.15 ±.18 - 19.05 ±.15 ±.15 ±.15 ±.18 - 25.40 - ±.18 - - - 31.75 - ±.25 - - -	TOLERANCE ON THE CIRCUMSCRIBED CIRCLE      														
	B	±.0002	±.005					I.C.      	6.35 ±.05 - - - - 9.525 ±.05 ±.05 ±.05 ±.05 ±.05 12.70 ±.08 ±.08 ±.08 ±.08 ±.08 15.875 ±.10 ±.10 ±.10 ±.10 ±.10 19.05 ±.10 ±.10 ±.10 - ±.10 25.40 - ±.13 - - ±.10 31.75 - ±.20 - - ±.12												
	C	±.0005	±.001							*Exact tolerances determined by size of insert	*Exact tolerances determined by size of insert. FOR CLASS M INSERTS SEE TABLE TO RIGHT										
	D	±.0005	±.005									*Exact tolerances determined by size of insert	*Exact tolerances determined by size of insert. FOR CLASS M INSERTS SEE TABLE TO RIGHT								
	E	±.001	±.001											*Exact tolerances determined by size of insert	*Exact tolerances determined by size of insert. FOR CLASS M INSERTS SEE TABLE TO RIGHT						
	G	±.001	±.005													*Exact tolerances determined by size of insert	*Exact tolerances determined by size of insert. FOR CLASS M INSERTS SEE TABLE TO RIGHT				
	M	±.002 to ±.005*																*Exact tolerances determined by size of insert	*Exact tolerances determined by size of insert. FOR CLASS M INSERTS SEE TABLE TO RIGHT		
	U	±.005 to ±.012*±.005																		*Exact tolerances determined by size of insert	*Exact tolerances determined by size of insert. FOR CLASS M INSERTS SEE TABLE TO RIGHT

T SHAPE	N CLEARANCE	G TOLERANCE	N TYPE
-------------------	-----------------------	-----------------------	------------------

CLEARANCE	TYPE(ANSI)	TYPE(ISO)
N - 0°	A With hole	A With hole
A - 3°	B With hole and one countersink	B With hole and one 70°-90° countersink
B - 5°	C With hole and two countersinks	C With hole and two 70°-90° countersinks
C - 7°	D Smaller than 1/4" I.C. with hole	F Chipbreaker both sides
P - 11°	E Smaller than 1/4" I.C.	G With hole, chipbreaker on both sides
D - 15°	F Chip grooves on top rake surfaces, without hole	H With hole, one 70°-90° countersink and chipbreaker on one side
E - 20°	G Chip grooves on top rake surfaces, with hole	J With hole, two 70°-90° countersinks and chipbreaker on both sides
F - 25°	H With hole, one countersink and chip grooves on one top rake surface	M With hole and chipbreaker on one side
G - 30°	J With hole, two countersinks and chip grooves on top rake surfaces	N No hole, no chipbreaker
	M With hole and chip grooves on one top rake surface	Q With hole, one 40°-60° countersink
	P With hole and 10° positive chip-breaker both sides	R Chipbreaker one side
	S With hole and 20° chip-breaker one side	T With hole, one 40°-60° countersink, chipbreaker one side
	X Dimple Lock (interchangeable with competitors notch lock style inserts)	W With hole, one 40°-60° countersink
	X V-Bottom	X Dimple Lock (interchangeable with competitors notch lock style inserts)
		X V-Bottom

SIZE									
R	V	D	C	S	T	M	I.C. (MM)	I.C. (INCH)	ANSI SYMBOL
03		04	S4	03	06	03	3,97	0.156	1.25
04	08	05	04	04	08	04	4,76	0.188	1.5
05	09	06	05	05	09	05	5,56	0.219	1.8
06	11*	06					6,00		
06*	11	07	06	06	11	06	6,35	0.250	2
07	13	09	08	07	13	07	7,94	0.313	2.5
08*							8,00		
09	16	11	09	09	16	09	9,525	0.375	3
10*							10,00		
12*							12,00		
12	22	15	12	12	22	12	12,70	0.500	4
15		19	16	15	27	15	15,875	0.625	5
16							16,00		
19	33	23	19	19	33	19	19,05	0.750	6
20*							20,00		
	38	27	22	22	38	22	22,225		
25*							25,00		
25	44	31	25	25	44	25	25,40	1.000	8
31		38	32	31	53	31	31,75	1.250	10
32							32,00		

THICKNESS			
ISO	MM	ANSI	INCH
01	1,59	1	0.062
T1	1,98	1.2	0.078
02	2,38	1.5	0.094
03	3,18	2	0.125
T3	3,97	2.5	0.156
04	4,76	3	0.188
05	5,56	3.5	0.219
06	6,35	4	0.250
07	7,94	5	0.313
09	9,52	6	0.375
12	12,7	8	0.500

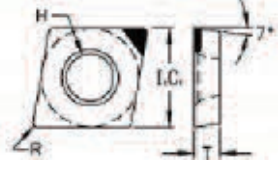




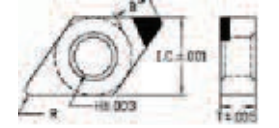
Rectangles and parallelograms use a 2 digits to size:
 1st digit-Number of 1/8ths inch in width
 2nd digit-Number of 1/4 inches in length

22	04	08	E
SIZE	THICKNESS	RADIUS	OTHER CONDITIONS
4	3	2	E

RADIUS			
ISO	MM	ANSI	INCH
00	SHARP EDGE	0	SHARP EDGE
02	0.2	0.5	0.008
04	0.4	1	0.016
08	0.8	2	0.031
12	1.2	3	0.047
16	1.6	4	0.062
20	2	5	0.078
24	2.4	6	0.094
28	2.78	7	0.109
32	3.18	8	0.125
00	ROUND INSERT	0	ROUND INSERT

OTHER CONDITIONS
A -Light hone
B -Medium hone
C -Heavy hone
D -Ground top and bottom only- Heavy hone
E -Unground insert honed
F -Unground insert not honed
J -Polished(rake face only)
T - T-Land
FA -Finishing application
SA -Standard application

SINGLE TIPPED INSERTS






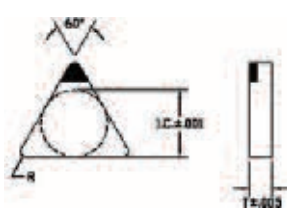
CCMW	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	CCMW 21.51	0.250	0.094	0.110	0.016	CCMW 06 02 04
	CCMW 21.52				0.032	CCMW 06 02 08
	CCMW 32.51	0.375	0.156	0.173	0.016	CCMW 09 T3 04
	CCMW 32.52				0.032	CCMW 09 T3 08
	CCMW 431	0.500	0.188	0.216	0.016	CCMW 12 04 04
	CCMW 432				0.032	CCMW 12 04 08
CPMW		I.C.	T	H	R	
	CPMW 21.51	0.250	0.094	0.110	0.016	CPMW 06 02 04
	CPMW 21.52				0.032	CPMW 06 02 08
	CPMW 32.51	0.375	0.156	0.173	0.016	CPMW 09 T3 04
	CPMW 32.52				0.032	CPMW 09 T3 08
	CPMW 431	0.50	0.188	0.216	0.016	CPMW 12 04 04
	CPMW 432				0.032	CPMW 12 04 08
CNGA		I.C.	T	H	R	
	CNGA 431	0.500	0.188	0.203	0.016	CNGA 12 04 04
	CNGA 432				0.032	CNGA 12 04 08
	CNGA 433				0.047	CNGA 12 04 12
DCMW		I.C.	T	H	R	
	DCMW 21.51	0.250	0.094	0.110	0.016	DCMW 07 02 04
	DCMW 21.52				0.032	DCMW 07 02 08
	DCMW 32.51	0.375	0.156	0.173	0.016	DCMW 11 T3 04
	DCMW 32.52				0.032	DCMW 11 T3 08
DPMW		I.C.	T	H	R	
	DPMW 21.51	0.250	0.094	0.110	0.016	DPMW 07 02 04
	DPMW 21.52				0.032	DPMW 07 02 08
	DPMW 32.51	0.375	0.156	0.173	0.016	DPMW 11 T3 04
	DPMW 32.52				0.032	DPMW 11 T3 08
DNGA (DNMA)		I.C.	T	H	R	
	DNGA 431	0.500	0.188	0.203	0.016	DNGA 15 04 04
	DNGA 432				0.032	DNGA 15 04 08

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45

NOTE: Segment size varies based on depth of cut and/ or customers' request

SINGLE TIPPED INSERTS







SNGA (SNMA)	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	SNGA 431	0.500	0.188	0.203	0.016	SNGA 12 04 04
	SNGA 432				0.032	SNGA 12 04 08
	SNGA 433				0.047	SNGA 12 04 12
SNGN		I.C.	T		R	
	SNGN 431	0.500	0.188		0.016	SNGN 12 04 04
	SNGN 432				0.032	SNGN 12 04 08
	SNGN 433				0.047	SNGN 12 04 12
SPGN		I.C.	T		R	
	SPGN 431	0.500	0.188		0.016	SPGN 12 04 04
	SPGN 432				0.032	SPGN 12 04 08
	SPGN 433				0.047	SPGN 12 04 12
TCGW (TCMW)		I.C.	T	H	R	
	TCGW 1.81.51	0.219	0.094	0.118	0.016	TCGW 09 02 04
	TCGW 21.51	0.250	0.094	0.110	0.016	TCGW 11 02 04
	TCGW 21.52				0.032	TCGW 11 02 08
	TCGW 32.51	0.375	0.156	0.173	0.016	TCGW 16 T3 04
	TCGW 32.52				0.032	TCGW 16 T3 08
TPGW (TPMW)		I.C.	T	H	R	
	TPGW 1.81.51	0.219	0.094	0.118	0.016	TPGW 09 02 04
	TPGW 21.51	0.250	0.094	0.110	0.016	TPGW 11 02 04
	TPGW 21.52				0.032	TPGW 11 02 08
	TPGW 32.51	0.375	0.156	0.173	0.016	TPGW 16 T3 04
	TPGW 32.52				0.032	TPGW 16 T3 08
TNG		I.C.	T		R	
	TNG 221	0.250	0.125		0.016	TNGN 11 03 04
	TNG 222				0.032	TNGN 11 03 08
	TNG 321	0.375	0.125		0.016	TNGN 16 03 04
	TNG 322				0.032	TNGN 16 03 08
	TNG 331				0.016	TNGN 16 04 04
	TNG 332		0.032	TNGN 16 04 08		
	TNG 431	0.500	0.188		0.016	TNGN 22 04 04
	TNG 432				0.032	TNGN 22 04 08
	TNG 433				0.047	TNGN 22 04 12

AVAILABLE GRADES (For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45


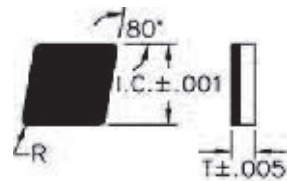
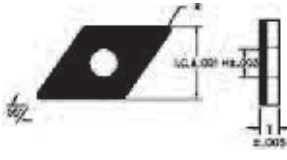
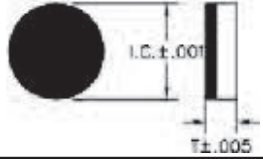
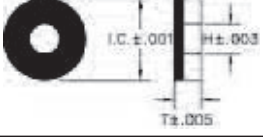
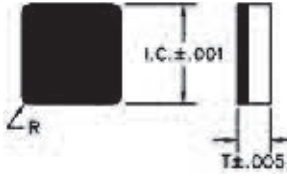
NOTE: Segment size varies based on depth of cut and/ or customers' request

SINGLE TIPPED INSERTS

TNMA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	TNMA 331	0.375	0.188	0.125	0.016	TNMA 16 04 04
	TNMA 332				0.032	TNMA 16 04 08
	TNMA 431	0.500	0.188	0.203	0.016	TNMA 22 04 04
	TNMA 432				0.032	TNMA 22 04 08
	TNMA 433				0.047	TNMA 22 04 12
VBMW		I.C.	T	R		
	VBMW 21.51	0.250	0.094	0.016	VBMW 11 02 04	
	VBMW 331	0.375	0.188	0.016	VBMW 16 04 04	
	VBMW 332	0.375	0.188	0.032	VBMW 16 04 08	
VCMW		I.C.	T	R		
	VCMW 21.51	0.250	0.094	0.016	VCMW 11 02 04	
	VCMW 331	0.375	0.188	0.016	VCMW 16 04 04	
	VCMW 332	0.375	0.188	0.032	VCMW 16 04 08	
VPMW		I.C.	T	R		
	VPMW 21.51	0.250	0.094	0.016	VPMW 11 02 04	
	VPMW 331	0.375	0.188	0.016	VPMW 16 04 04	
	VPMW 332	0.375	0.188	0.032	VPMW 16 04 08	
VNMA		I.C.	T	H	R	
	VNMA 331	0.375	0.188	0.150	0.016	VNMA 16 04 04
	VNMA 332				0.032	VNMA 16 04 08
WNMA		I.C.	T	H	R	
	WNMA 431	0.500	0.188	0.203	0.016	WNMA 08 04 04
	WNMA 432				0.032	WNMA 08 04 08

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)													
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

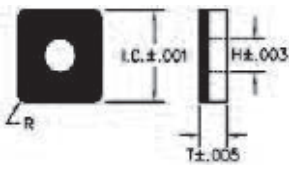
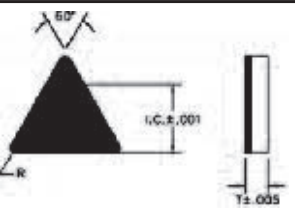
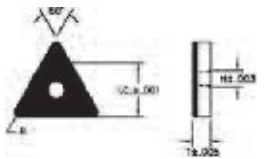
FULL TOP PCBN INSERTS

CNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H		
	CNGA 431	0.500	0.188	0.203	0.016	CNGA 12 04 04
	CNGA 432				0.032	CNGA 12 04 08
	CNGA 433				0.047	CNGA 12 04 12
	CNGA 434				0.062	CNGA 12 04 16
CNGN		I.C.	T	R		
	CNGN 321	0.375	0.125	0.016	CNGN 09 03 04	
	CNGN 322			0.032	CNGN 09 03 08	
	CNGN 431	0.500	0.188	0.016	CNGN 12 04 04	
	CNGN 432			0.032	CNGN 12 04 08	
	CNGN 433			0.047	CNGN 12 04 12	
DNGA		I.C.	T	R		
	DNGA 431	0.500	0.188	0.016	DNGA 12 04 04	
	DNGA 432			0.032	DNGA 12 04 08	
	DNGA 433			0.047	DNGA 12 04 12	
	DNGA 434			0.062	DNGA 12 04 16	
RNG		I.C.	T	R		
	RNG 22	0.250	0.125	-	RNGN 06 03 00	
	RNG 32	0.375	0.125	-	RNGN 09 03 00	
	RNG 42	0.500	0.125	-	RNGN 12 03 00	
	RNG 43			0.188	-	RNGN 12 04 00
RNGA		I.C.	T	H		
	RNGA 43	0.500	0.188	0.203	RNGA 12 04 00	
	RNGA 53	0.625	0.188	0.25	RNGA 15 04 00	
	RNGA 83	1.000	0.188	0.359	RNGA 25 04 00	
SNG		I.C.	T	R		
	SNG 321	0.375	0.125	0.016	SNGN 09 03 04	
	SNG 322			0.032	SNGN 09 03 08	
	SNG 431	0.500	0.188	0.016	SNGN 12 04 04	
	SNG 432			0.032	SNGN 12 04 08	
	SNG 433			0.047	SNGN 12 04 12	
	SNG 434			0.062	SNGN 12 04 16	

AVAILABLE GRADES (For grade characteristics and applications see pages 2-7)

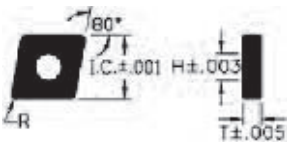
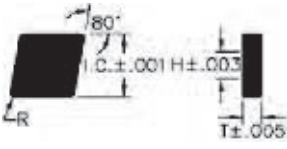
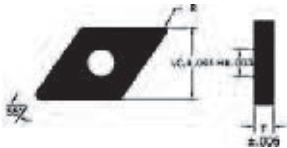


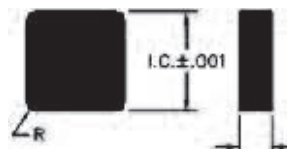
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

FULL TOP PCBN INSERTS

SNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	SNGA 431	0.500	0.188	0.203	0.016	SNGA 12 04 04
	SNGA 432				0.032	SNGA 12 04 08
	SNGA 433				0.047	SNGA 12 04 12
	SNGA 434	1.000	0.188	0.359	0.062	SNGA 12 04 16
	SNGA 832				0.032	SNGA 25 04 08
	SNGA 833				0.047	SNGA 25 04 12
SNGA 834				0.062	SNGA 25 04 16	
TNG		I.C.	T	R		
	TNG 221	0.250	0.125	0.016	TNGN 11 03 04	
	TNG 222			0.032	TNGN 11 03 08	
	TNG 321	0.375	0.125	0.016	TNGN 16 03 04	
	TNG 322			0.032	TNGN 16 03 08	
	TNG 331			0.188	0.016	TNGN 16 04 04
	TNG 332	0.032	TNGN 16 04 08			
	TNG 432	0.500	0.188	0.032	TNGN 22 04 08	
	TNG 433			0.047	TNGN 22 04 12	
TNGA		I.C.	T	R		
	TNGA 331	0.375	0.188	0.016	TNGA 16 04 04	
	TNGA 332			0.032	TNGA 16 04 08	
	TNGA 333			0.047	TNGA 16 04 12	

AVAILABLE GRADES (For grade characteristics and applications see pages 2-7)													
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

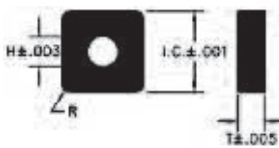
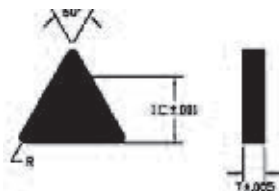
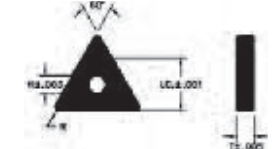
SOLID PCBN INSERTS

CNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	CNGA 431	0.500	0.188	0.203	0.016	CNGA 12 04 04
	CNGA 432				0.032	CNGA 12 04 08
	CNGA 433				0.047	CNGA 12 04 12
	CNGA 434				0.062	CNGA 12 04 16
CNGN		I.C.	T	R		
	CNGN 321	0.375	0.125	0.016	CNGN 09 03 04	
	CNGN 322			0.032	CNGN 09 03 08	
	CNGN 431	0.500	0.188	0.016	CNGN 12 04 04	
	CNGN 432			0.032	CNGN 12 04 08	
	CNGN 433			0.047	CNGN 12 04 12	
DNGA		I.C.	T	R		
	DNGA 431	0.500	0.188	0.016	DNGA 12 04 04	
	DNGA 432			0.032	DNGA 12 04 08	
	DNGA 433			0.047	DNGA 12 04 12	
	DNGA 434			0.062	DNGA 12 04 16	
RNG		I.C.	T	R		
	RNG 22	0.250	0.125	-	RNGN 06 03 00	
	RNG 32	0.375	0.125	-	RNGN 09 03 00	
	RNG 42	0.500	0.125	-	RNGN 12 03 00	
	RNG 43		0.188	-	RNGN 12 04 00	
RNGA		I.C.	T	H		
	RNGA 43	0.500	0.188	0.203	RNGA 12 04 00	
	RNGA 53	0.625	0.188	0.25	RNGA 15 04 00	
	RNGA 83	1.000	0.188	0.359	RNGA 25 04 00	
SNG		I.C.	T	R		
	SNG 321	0.375	0.125	0.016	SNGN 09 03 04	
	SNG 322			0.032	SNGN 09 03 08	
	SNG 431	0.500	0.188	0.016	SNGN 12 04 04	
	SNG 432			0.032	SNGN 12 04 08	
	SNG 433			0.047	SNGN 12 04 12	
	SNG 434			0.062	SNGN 12 04 16	

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

SOLID PCBN INSERTS

SNGA	INSERT NUMBER	DIMENSIONS				ISO CODE NUMBERS
		I.C.	T	H	R	
	SNGA 431	0.500	0.188	0.203	0.016	SNGA 12 04 04
	SNGA 432				0.032	SNGA 12 04 08
	SNGA 433				0.047	SNGA 12 04 12
	SNGA 434				0.062	SNGA 12 04 16
	SNGA 832	1.000	0.188	0.359	0.032	SNGA 25 04 08
	SNGA 833				0.047	SNGA 25 04 12
	SNGA 834				0.062	SNGA 25 04 16
TNG		I.C.	T	R		
	TNG 221	0.250	0.125	0.016	TNGN 11 03 04	
	TNG 222			0.032	TNGN 11 03 08	
	TNG 321	0.375	0.125	0.016	TNGN 16 03 04	
	TNG 322			0.032	TNGN 16 03 08	
	TNG 331			0.188	0.016	TNGN 16 04 04
	TNG 332	0.032	TNGN 16 04 08			
	TNG 432	0.500	0.188	0.032	TNGN 22 04 08	
	TNG 433			0.047	TNGN 22 04 12	
	TNGA		I.C.	T	R	
	TNGA 331	0.375	0.188	0.016	TNGA 16 04 04	
	TNGA 332			0.032	TNGA 16 04 08	
	TNGA 333			0.047	TNGA 16 04 12	

AVAILABLE GRADES (For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

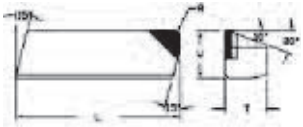
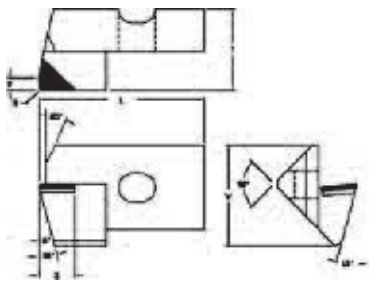

CARTRIDGE INSERTS

SDR-100	INSERT NUMBER	DIMENSIONS					EDGE LENGTH
		L	T	W	R		
	SDR-100-020-E1	0.875	0.250	0.375	0.020	0.250	
	SDR-100-020-E3					0.500	
	SDR-100-020-E5					0.750	
	SDR-100-031-E1				0.031	0.250	
	SDR-100-031-E3					0.500	
	SDR-100-031-E5					0.750	
SDL-200		DIMENSIONS					EDGE LENGTH
		L	T	W	R		
	SDL-200-020-E1	0.875	0.25	0.375	0.020	0.250	
	SDL-200-020-E3					0.500	
	SDL-200-020-E5					0.750	
	SDL-200-031-E1				0.031	0.250	
	SDL-200-031-E3					0.500	
	SDL-200-031-E5					0.750	
SDR-102		DIMENSIONS					EDGE LENGTH
		L	T	W	R	WIPER	
	SDR-102-020-E1W1	0.875	0.250	0.375	0.020	0.020	0.250
	SDR-102-020-E3W1						0.500
	SDR-102-020-E5W1						0.750
	SDR-102-031-E1W1				0.030	0.020	0.250
	SDR-102-031-E3W1						0.500
	SDR-102-031-E5W1						0.750
	SDR-102-020-E1W2	0.875	0.250	0.375	0.020	0.030	0.250
	SDR-102-020-E3W2						0.500
	SDR-102-020-E5W2						0.750
	SDR-102-031-E1W2				0.030	0.030	0.250
	SDR-102-031-E3W2						0.500
	SDR-102-031-E5W2						0.750
SDL-202		DIMENSIONS					EDGE LENGTH
		L	T	W	R	WIPER	
	SDL-202-020-E1W1	0.875	0.250	0.375	0.020	0.020	0.250
	SDL-202-020-E3W1						0.500
	SDL-202-020-E5W1						0.750
	SDL-202-031-E1W1				0.030	0.020	0.250
	SDL-202-031-E3W1						0.500
	SDL-202-031-E5W1						0.750
	SDL-202-020-E1W2	0.875	0.250	0.375	0.020	0.030	0.250
	SDL-202-020-E3W2						0.500
	SDL-202-020-E5W2						0.750
	SDL-202-031-E1W2				0.030	0.030	0.250
	SDL-202-031-E3W2						0.500
	SDL-202-031-E5W2						0.750

AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)

PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

CARTRIDGE INSERTS

EDR-10X	INSERT NUMBER	DIMENSIONS					
		L	T	W	R	WIPER	EDGE LENGTH
	EDR-100-031-E1	0.875	0.250	0.375	0.030	-	0.250
	EDR-100-031-E3						0.500
	EDR-100-031-E4						0.625
	EDR-100-031-E5						0.750
	EDR-102-031-E1W2					0.030	0.250
	EDR-102-031-E3W2						0.500
	EDR-102-031-E4W2						0.625
	EDR-102-031-E5W2						0.750
UCDR	DIMENSIONS						
	L	T	W	S	X	R	
							
UCDR-11-00		1.236	0.600	0.750	0.265	0.060	0.010
UCDR-11-01						0.060	0.010
UCDR-20-00						0	0.030
UCDR-22-00						0.080	0.030

PCD AND PCBN DOUBLE TIPPED INSERTS

For maximum economy try Indexable DT (double tipped inserts in PCBN for light to medium ferrous material machining.) Two cutting edges per insert. This design will result in a substantial lower price per cutting edge.



AVAILABLE GRADES(For grade characteristics and applications see pages 2-7)													
PCD					PCBN								
PCD	PCD 3	PCD-F	PCD-UF	PCD-XUF	CBN100	CBN95	CBN90	CBN80	CBN80D	CBN70	CBN60	CBN50	CBN45
NOTE: Segment size varies based on depth of cut and/ or customers' request													

SPECIALS

SPECIALS

FABRICATING TOOLING SPECIALS IS AN EXACTING TRADE.

Their demanding specifications and elaborate styles leave no tolerance for error.

Indexable is a master at producing specials.

If you have a special need please contact our technical department.
We offer solutions in the widest selection of materials, grades, shapes and sizes.

PLEASE NOTE:

Indexable catalogs DO NOT SHOW the complete line of any given product. At least 50% of Indexable sales are for inserts not represented in our catalogs. For a more detailed understanding of INDEXABLE's manufacturing capabilities visit our website at ***WWW.INDEXABLE.COM***

If you fail to find an item you are looking for please contact our knowledgeable staff at ***INFO@INDEXABLE.COM***. Indexable has the manufacturing capability of producing a wide array of inserts.



Head Office
66 Clark Street
Welland, Ontario, Canada
L3B 5W6

Advanced Ceramics Division
1919-94 Street N.W.
Edmonton, Alberta, Canada
T6N 1E6

U.S. Shipping
181 Cooper Avenue,
Suite #104
Tonawanda, New York, U.S.
14150

T. 905-735-8665
1-800-446-4946
F. 905-735-5427



**For a more detailed
understanding of
Indexable's capabilities
visit our Web Site at
www.indexable.com**